

DS-2CE72DF0T-LPTS 2MP Two Way Audio ColorVu Fixed Turret Camera




- High quality imaging with 2 MP, 1920 × 1080 resolution
- 24/7 color imaging with F1.0 aperture
- Smart-Hybrid Light, optimize your security with flexible lighting options
- 3D DNR technology delivers clean and sharp images
- Up to 20 m white light and 30 m IR distance for bright night imaging
- Built-in mic and built-in speaker , high quality audio with audio over coaxial cable
- Provide real-time communication via built-in two-way audio
- Water and dust resistant (IP67)

▪ Specification

Model		DS-2CE72DF0T-LPTS
Camera	Image Sensor	2 MP CMOS
	Max. Resolution	1920 (H) × 1080 (V)
	Min. Illumination	0.001 Lux @ (F1.0, AGC ON), 0 Lux with white light
	Shutter Time	PAL: 1/25 s to 1/50,000 s, NTSC: 1/15 s to 1/50,000 s
	Day & Night	ICR
	Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360°
	Signal System	PAL/NTSC
Lens	Lens Type	2.8 mm, 3.6 mm fixed lens
	Focal Length & FOV	2.8 mm, horizontal FOV: 92°, vertical FOV: 49°, diagonal FOV: 110°; 3.6 mm, horizontal FOV: 81°, vertical FOV: 44°, diagonal FOV: 95°
	Lens Mount	M12
Microphone	Pickup Distance	In a radius of up to 5 m
	Amount	1
Speaker	Rated Power	2 W
	Speaker Range	In a radius of up to 5 m
Illuminator	Supplement Light Type	Smart, IR, White Light
	Supplement Light Range	IR: Up to 30 m, White Light: Up to 20 m
Image	Image Settings	Anti-banding, Brightness, Sharpness, Smart IR
	Frame Rate	TVI: 1080p @ 25 fps/30 fps
	Day/Night Mode	Auto/Color
	Wide Dynamic Range (WDR)	Digital WDR
	Image Enhancement	DWDR, BLC, HLC, Global
	Noise Reduction	3D DNR
	White Balance	Auto, Manual
Audio	Audio Function	Echo Cancellation, AI Noise Reduction, Automatic Gain Control

Interface	Video Output	1 HD analog output
General	Power	12 VDC $\pm$ 25%, max.5 W,*You are recommended to use one power adapter to supply the power for one camera.
	Material	Plastic
	Dimension	$\varnothing$ 110 mm $\times$ 93 mm ($\varnothing$ 4.3" $\times$ 3.7")
	Weight	Approx. 265 g (0.6 lb.)
	Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F). Humidity 90% or less (non-condensing)
	Communication	HIKVISION-C
	Language	English
Approval	Protection	IP67

▪ Dimension

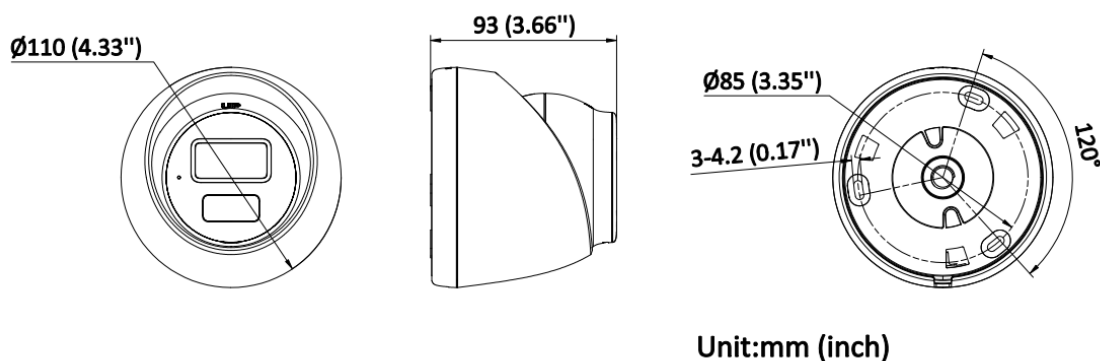

▪ Accessory

▪ Optional

DS-1272ZJ-110-TRS Wall mount	DS-1281ZJ-S Inclined ceiling mount	DS-1276ZJ-SUS Corner mount	DS-1275ZJ-SUS Vertical pole mount
			

See Far, Go Further



www.hikvision.com
support@hikvision.com

